
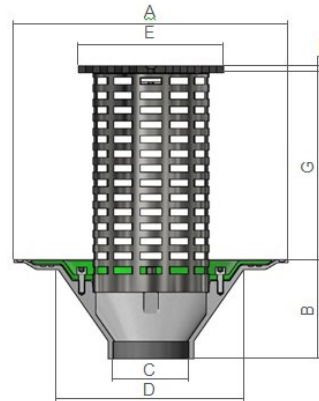


IKO Extended Grate Roof Outlet

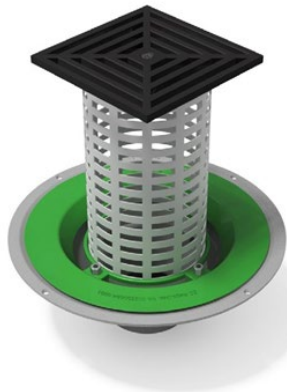

Part Code	Pipe connection size (O.D)	A	B	C	D	E	F	G Max. (cut down to requirement)	Max. Flow rate (l/s)
IKOAR82TG	82mmØ	377	111	82	255	200	10	255	5
IKOAR110TG	110mmØ	377	136	110	255	200	10	255	10.7
IKOAR160TG	160mmØ	377	111	160	255	200	10	255	19

Flow rates are measured at 35mm head of water for outlets up to 110mmØ and 45mm head of water for 160mmØ outlets, in accordance with BS EN 1253-2. Units are supplied with 500mm long threaded PVCu pipe connectors

PRODUCT INFORMATION

IKO Elite rainwater drainage outlets, together with ancillary components, are suitable for use with hot melt and reinforced bitumen membranes.

- All outlet components are manufactured from marine grade aluminium to give an extensive life expectancy of at least 50 years.
- To ensure ultimate reliability and confidence, the Elite outlet range has been rigorously tested to withstand water depths surpassing 1m.
- The Elite range incorporates PVCu pipe connectors, providing an air tight seal and thermal break between the outlet body and connecting pipework, preventing cold bridging.
- Our roof outlet range connects to all common PVCu, HDPE and socketless cast iron pipework sizes.
- Supplied threaded PVCu pipe connectors are manufactured from BS EN 1329 pipework and are therefore suitable for use with pipe wraps and fire collars.

MAINTENANCE

For optimum performance, roof outlets should be inspected and cleaned every six months to ensure peak operation.